




**GROMMET STEEL WIRE ROPE SLING WITH STEEL CORE EN 13414-3**  
**BRACHE AD ANELLO CONTINUO IN FUNE ACCIAIO R.1960**

PESO /MT		Metallica	Tessile	ASOLE	Coef.sic.
	DIAM.	WLL : IWRC	WLL PP/FC	SOFT EYE	Safety F.
0,3 KG	9	1,25 T	1,17 T	140X70 MM	5
0,45 KG	12	2,3 T	2,1 T	140X70 MM	5
0,7 KG	15	3,5 T	3,24 T	180X90 MM	5
1 KG	18	5,7 T	4,8 T	220X110 MM	5
1,32 KG	21	7,7 T	6,34 T	250X125 MM	5
1,9 KG	24	9,84 T	8,2 T	290X145 MM	5
2,4 KG	27	12,47 T	10,5 T	320X160 MM	5
3 KG	30	15,37 T	13,2 T	360X180 MM	5
3,7 KG	33	18,6 T	15,7 T	360X180 MM	5
4,4 KG	36	22,25 T	18,6 T	430X215 MM	5
5,1 KG	39	26 T	22 T	470X235 MM	5
6 KG	42	30,18 T	26 T	500X250 MM	5
6,8 KG	45	34 T	29,9 T	500X250 MM	5
7,8 KG	48	39,43 T	34 T	580X290 MM	5
9,8 KG	54	49,78 T	43 T	650X325 MM	5
12 KG	60	61,45 T	52,5 T	720X360 MM	5
14,8 KG	66	76,28 T		800X400 MM	4,88
17,6 KG	72	93,2 T		860X430 MM	4,75
20,5 KG	78	112,76 T		940X470 MM	4,61
24 KG	84	134,47 T		1000X500MM	4,48
27,5 KG	90	159 T		1200X600MM	4,35
31 KG	96	186,59 T		1200X600MM	4,22
35.5 KG	102	217,3 T		1400X700MM	4,09
40 KG	108	252,3 T		1500X750MM	3,95
44,5 KG	114	290,6 T		1600X800MM	3,82
49 KG	120	333,37 T		1800X900MM	3,69

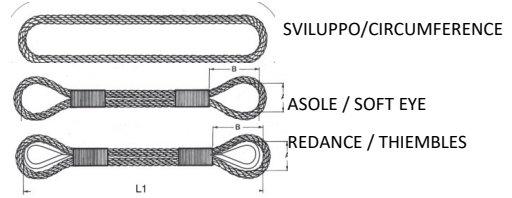

2025